

1C56. Order form.

Customer

Customer no.

Company

Street

Postal code City

O&P professional

Shipping address (if different from customer address)

Customer no.

Company

Street

Postal code City

Customer ref.

Selection of the spring stiffness relative to

1. body weight and activity as well as

Body weight (kg)	Low activity level	Normal activity level
Up to 51	1	2
52 to 58	2	3
59 to 67	3	4
68 to 77	4	5
78 to 88	5	6
89 to 100	6	7
101 to 115	7	-

2. foot size


Stiffness	Foot size						
	1	2	3	4	5	6	7
22						-	-
23							-
24							-
25							
26							
27	-	-					
28	-	-					

no restrictions

Example for ordering with 2C8* footshell:

1C56=R26-4-P/4


Article no.	Side	Size	Stiffness	Colour
1C56	=		-	P /

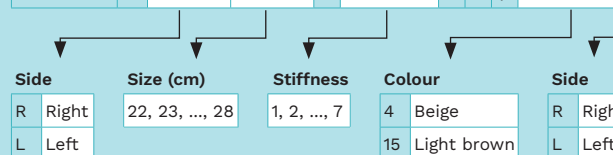

Example for ordering with 2C15* low cut footshell:





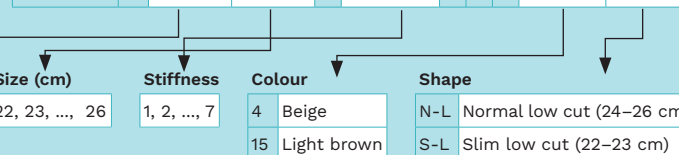

1C56=R26-4-P/4N-L

Article no.	Side	Size	Stiffness	Colour	Shape
1C56	=		-	P /	



The scope of delivery includes the 1C56 foot module, the 2C8 footshell including connection cover or the 2C15 low cut footshell, 2F50 heel wedge set (comprising three different degrees of hardness) and a black Spectra sock.

Recommended combinations*

TT	TF
 4R140 One-way valve + 453A30/40 ProFlex Plus sealing sleeve + 6Y95 Caleo 3D or 4R180 Harmony P4 + 453A30/40 ProFlex Plus sealing sleeve + 6Y512=*-P Uneo Fresh	 7T451=1 SiOCX TF Pro or 6Y110 Skeo Sealing + 21Y21 Click Valve
 4R11=* Quickchange	 3C60* Kenevo, 3R85* Dynion, 3C98* C-Leg, 3B1* Genium or 3B5* Genium X3  4R57=WR Waterproof Rotation Adapter 4R11=* Quickchange
	 3F1=* + 99B120=* Functional cosmesis

* All components are sold separately and are available Ottobock products that are compatible with the 1C56 *Taleo Adjust* foot, which helps ensure optimal performance. Practitioners need to select components based upon individual patient criteria.